

GIT SPC CORE FLOORING - 5mm

 **GIT WHOLESLE.CA**
GIT FLOORING



PRODUCT INFORMATION

Structure	Waterproof SPC core
Plank Size (Thickness*Width*Length)	4 mm+1 mm*180mm*1220mm 0.16"+0.04"*7*48"
Underlayment	Cross-linked Polymer
Edge Finish	Micro Bevel Edge
Finish	Upgraded UV treatment
Installation	Floating installation with an efficient click-lock system
Overall Thickness	5mm
Wear Layer Thickness	0.5mm

PACKAGING

Planks/Carton	11
Coverage/Carton(sft)	26
Carton Dimensions (Thickness*Width*Length)	2 1/2* 7 1/2*48 1/2
Carton Weight (lbs)	44.42 lbs
Cartons/Pallet	55
Coverage/Pallet (sft)	1430
Brand	GIT Flooring

WARRANTY

Residential	15year
Commercial	5 year light commercial


TECHNICAL DETAILS

TEST	METHOD	RESULTS
Determination of Thickness	EN 428:1993	+ 0.33mm
Determination of Squareness	EN 427:1994	0.12mm
Stain Resistance	N/A	N/A
Castor Chair Resistance @25.000cycles	EN 425:2002	Pass
Residual indentation Static Load	ASTM F1914-18	1.3%
Resistance to Abrasion	ASTM D4060	49.3 mg
	GB/T 4085-2015	2.7mm ³
Dimensional Stability and Curling	ASTM 434	0.05%
Calculated improvement in impact insulation class : Δ IIC	ASTM E2179-03 ASTM E989-18	21
Classification of Smoke Development	N/A	N/A
Peel Resistance	GB/T 11982.1-2015	2.6 mm ³
	GB/T 11982.1-6.9	95N/ 50mm
Reaction to Fire	GB/T 8624	no damage
Slip Resistance	N/A	N/A
Calculated Sound Transmission Class :STC	ASTM E90-109	53
Determination of flexibility	EN 435: 1994	Pass
Soluble Heavy Metal	ASTM F963-17 Clause 4.3.5.2(2)b	Not detected
Resistance to Chemicals	N/A	N/A
Colour Fastness to light	ISO 105-B02:2014, Method 3,Grade 6	Above Grade 6

FLOORSCORE®

FloorScore ®	Certified
--------------	-----------

Read installation instructions carefully; incorrect installation voids warranty. Sweep or vacuum floor often, and wipe up spills immediately. Use protective mats and pads on furniture legs. Do not use wax, oil-based cleaners, ammonia, or abrasive agents. Use vinyl flooring cleaning products only. Product selection, color, and specifications may change without notice. For accurate color representation, choose products based on actual samples. Normal spills won't harm the floor, but clean them up promptly. Warranty excludes damage from standing water, weather conditions, natural disasters, and high heels. Use area rugs or protective runners to avoid high heel damage. Please refer to the installation manual. Note that the above test report may be subject to change based on new test certificates.

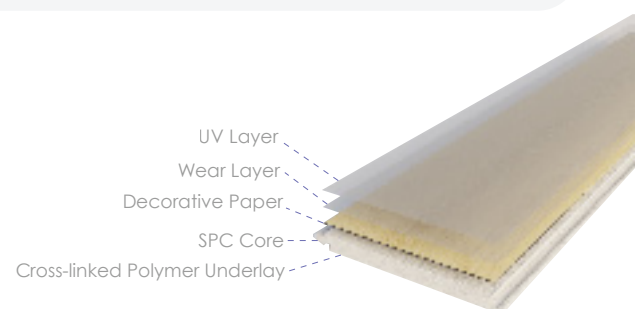

GIT SPC CORE FLOORING - 5.5mm

 **GIT WHOLESLE.CA**
GIT FLOORING



PRODUCT INFORMATION



Structure	Waterproof SPC core
Plank Size (Thickness*Width*Length)	4.5mm+1mm*180mm*1220mm 0.018"+0.04'*7'48"
Underlayment	Cross-linked Polymer
Edge Finish	Micro Bevel Edge
Finish	Upgraded UV treatment
Installation	Floating installation with an efficient click-lock system
Overall Thickness	5.5mm
Wear Layer Thickness	0.5mm

PACKAGING



Planks/Carton	10
Coverage/Carton(sft)	23.64
Carton Dimensions (Thickness*Width*Length)	2.24* 7.68*48.66
Carton Weight (lbs)	46.5 lbs
Cartons/Pallet	55
Coverage/Pallet (sft)	1300.2
Brand	GIT Flooring

WARRANTY



Residential	15year
Commercial	5 year light commercial

TECHNICAL DETAILS




TEST	METHOD	RESULTS
Determination of Thickness	EN 428:1993	+ 0.33mm
Determination of Squareness	EN 427:1994	0.12mm
Stain Resistance	N/A	N/A
Castor Chair Resistance @25.000cycles	EN 425:2002	Pass
Residual indentation Static Load	ASTM F1914-18	1.3%
Resistance to Abrasion	ASTM D4060	49.3 mg
	GB/T 4085-2015	2.7mm ³
Dimensional Stability and Curling	ASTM 434	0.05%
Calculated improvement in impact insulation class : Δ IIC	ASTM E2179-03 ASTM E989-18	21
Classification of Smoke Development	N/A	N/A
Peel Resistance	GB/T 11982.1-2015	2.6 mm ³
	GB/T 11982.1-6.9	95N/ 50mm
Reaction to Fire	GB/T 8624	no damage
Slip Resistance	N/A	N/A
Calculated Sound Transmission Class :STC	ASTM E90-109	53
Determination of flexibility	EN 435: 1994	Pass
Soluble Heavy Metal	ASTM F963-17 Clause 4.3.5.2(2)b	Not detected
Resistance to Chemicals	N/A	N/A
Colour Fastness to light	ISO 105-B02:2014, Method 3,Grade 6	Above Grade 6

FLOORSCORE®

FloorScore®	Certified
-------------	-----------

Read installation instructions carefully; incorrect installation voids warranty. Sweep or vacuum floor often, and wipe up spills immediately. Use protective mats and pads on furniture legs. Do not use wax, oil-based cleaners, ammonia, or abrasive agents. Use vinyl flooring cleaning products only. Product selection, color, and specifications may change without notice. For accurate color representation, choose products based on actual samples. Normal spills won't harm the floor, but clean them up promptly. Warranty excludes damage from standing water, weather conditions, natural disasters, and high heels. Use area rugs or protective runners to avoid high heel damage. Please refer to the installation manual. Note that the above test report may be subject to change based on new test certificates.

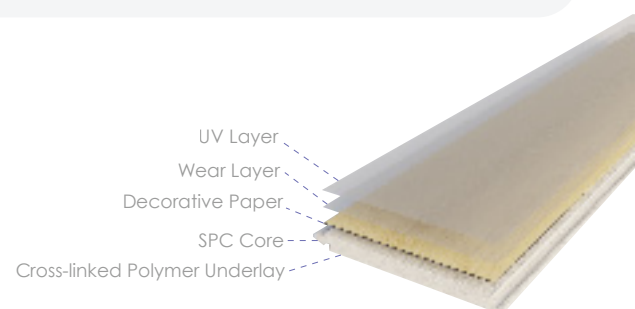

GIT SPC CORE FLOORING - 5.5mm

Larger plank 9x60"

 **GIT WHOLESLE.CA**
GIT FLOORING



PRODUCT INFORMATION

Structure	Waterproof SPC core
Plank Size (Thickness*Width*Length)	0.018"+0.04" x9" x 60"
Underlayment	Cross-linked Polymer
Edge Finish	Micro Bevel Edge
Finish	Upgraded UV treatment
Installation	Floating installation with an efficient click-lock system
Overall Thickness	5.5mm
Wear Layer Thickness	0.5mm

PACKAGING

Planks/Carton	8 pcs
Coverage/Carton(sft)	30.24
Carton Dimensions (Thickness*Width*Length)	1.8"x9"x60"
Carton Weight (lbs)	55 lbs
Cartons/Pallet	48
Coverage/Pallet (sft)	1451.52
Brand	GIT Flooring

WARRANTY

Residential	15year
Commercial	5 year light commercial


TECHNICAL DETAILS

TEST	METHOD	RESULTS
Determination of Thickness	EN 428:1993	+ 0.33mm
Determination of Squareness	EN 427:1994	0.12mm
Stain Resistance	N/A	N/A
Castor Chair Resistance @25.000cycles	EN 425:2002	Pass
Residual indentation Static Load	ASTM F1914-18	1.3%
Resistance to Abrasion	ASTM D4060	49.3 mg
	GB/T 4085-2015	2.7mm ³
Dimensional Stability and Curling	ASTM 434	0.05%
Calculated improvement in impact insulation class : Δ IIC	ASTM E2179-03 ASTM E989-18	21
Classification of Smoke Development	N/A	N/A
Peel Resistance	GB/T 11982.1-2015	2.6 mm ³
	GB/T 11982.1-6.9	95N/ 50mm
Reaction to Fire	GB/T 8624	no damage
Slip Resistance	N/A	N/A
Calculated Sound Transmission Class :STC	ASTM E90-109	53
Determination of flexibility	EN 435: 1994	Pass
Soluble Heavy Metal	ASTM F963-17 Clause 4.3.5.2(2)b	Not detected
Resistance to Chemicals	N/A	N/A
Colour Fastness to light	ISO 105-B02:2014, Method 3,Grade 6	Above Grade 6

FLOORSCORE®

FloorScore®	Certified
-------------	-----------

Read installation instructions carefully; incorrect installation voids warranty. Sweep or vacuum floor often, and wipe up spills immediately. Use protective mats and pads on furniture legs. Do not use wax, oil-based cleaners, ammonia, or abrasive agents. Use vinyl flooring cleaning products only. Product selection, color, and specifications may change without notice. For accurate color representation, choose products based on actual samples. Normal spills won't harm the floor, but clean them up promptly. Warranty excludes damage from standing water, weather conditions, natural disasters, and high heels. Use area rugs or protective runners to avoid high heel damage. Please refer to the installation manual. Note that the above test report may be subject to change based on new test certificates.

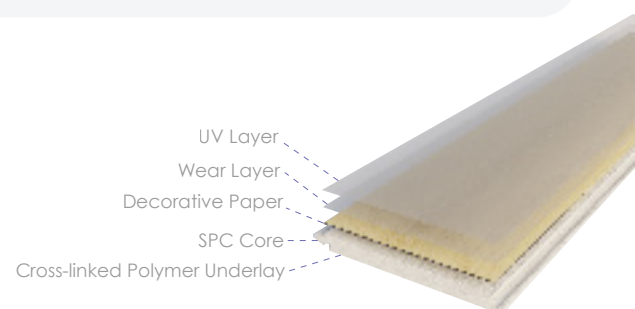

SPC CORE FLOORING HERRINGBONE PATTERN - 7mm

5x24" (128x610mm)

GIT WHOLESLE.CA
GIT FLOORING



PRODUCT INFORMATION

Structure	Waterproof SPC core
Plank Size (Thickness*Width*Length)	0.025"+0.275" x 5" x 24"
Underlayment	Cross-linked Polymer
Edge Finish	Bevel Edge
Finish	Upgraded UV treatment
Installation	Floating installation with an efficient click-lock system
Overall Thickness	7mm
Wear Layer Thickness	0.55mm

TECHNICAL DETAILS

TEST	METHOD	RESULTS
Determination of Thickness	EN 428:1993	+ 0.33mm
Determination of Squareness	EN 427:1994	0.12mm
Stain Resistance	N/A	N/A
Castor Chair Resistance @25.000cycles	EN 425:2002	Pass
Residual indentation Static Load	ASTM F1914-18	1.3%
Resistance to Abrasion	ASTM D4060	49.3 mg
	GB/T 4085-2015	2.7mm ³
Dimensional Stability and Curling	ASTM 434	0.05%
Calculated improvement in impact insulation class : Δ IIC	ASTM E2179-03 ASTM E989-18	21
Classification of Smoke Development	N/A	N/A
Peel Resistance	GB/T 11982.1-2015	2.6 mm ³
	GB/T 11982.1-6.9	95N/ 50mm
Reaction to Fire	GB/T 8624	no damage
Slip Resistance	N/A	N/A
Calculated Sound Transmission Class :STC	ASTM E90-109	53
Determination of flexibility	EN 435: 1994	Pass
Soluble Heavy Metal	ASTM F963-17 Clause 4.3.5.2(2)b	Not detected
Resistance to Chemicals	N/A	N/A
Colour Fastness to light	ISO 105-B02:2014, Method 3,Grade 6	Above Grade 6

PACKAGING

Planks/Carton	24 pcs
Coverage/Carton(sft)	21.5
Carton Dimensions (Thickness*Width*Length)	6.61" x 5" x 24"
Carton Weight (lbs)	55 lbs
Cartons/Pallet	42
Coverage/Pallet (sft)	903 sqft
Brand	GIT Flooring


WARRANTY

Residential	15year
Commercial	5 year light commercial

FLOORSCORE®

FloorScore®	Certified
-------------	-----------

Read installation instructions carefully; incorrect installation voids warranty. Sweep or vacuum floor often, and wipe up spills immediately. Use protective mats and pads on furniture legs. Do not use wax, oil-based cleaners, ammonia, or abrasive agents. Use vinyl flooring cleaning products only. Product selection, color, and specifications may change without notice. For accurate color representation, choose products based on actual samples. Normal spills won't harm the floor, but clean them up promptly. Warranty excludes damage from standing water, weather conditions, natural disasters, and high heels. Use area rugs or protective runners to avoid high heel damage. Please refer to the installation manual. Note that the above test report may be subject to change based on new test certificates.

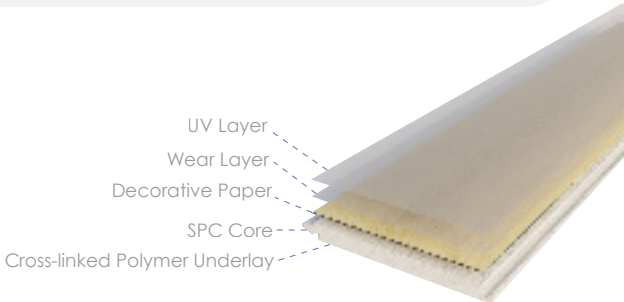

SPC CORE FLOORING HERRINGBONE PATTERN - 7mm

